



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>7</sup> : H01Q 1/24, 9/27, 1/38</p>	<p>A1</p>	<p>(11) International Publication Number: <b>WO 00/03453</b> (43) International Publication Date: 20 January 2000 (20.01.00)</p>
<p>(21) International Application Number: PCT/SE99/01251 (22) International Filing Date: 9 July 1999 (09.07.99) (30) Priority Data: 09/112,366 9 July 1998 (09.07.98) US (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE). (72) Inventor: YING, Zhinong; Skyttelinjen 50, S-226 42 Lund (SE). (74) Agent: ERICSSON MOBILE COMMUNICATIONS AB; IPR Dept., S-221 83 Lund (SE).</p>		<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>
<p>(54) Title: MINIATURE PRINTED SPIRAL ANTENNA FOR MOBILE TERMINALS</p> <div data-bbox="350 1173 1305 1724"> <p>Matching bridge 330</p> <p>PCB 310</p> <p>Spiral metal strip 315</p> <p>Dielectric substrate 320</p> <p>Antenna feed pin 325</p> <p>Ground post 335</p> </div> <p>(57) Abstract</p> <p>A built-in antenna is provided which includes a printed spiral metal strip that is connected to the mobile terminal's printed circuit board via a substrate. Matching of the antenna is performed by a matching bridge which is positioned between a feeding pin and a grounded post. By adjusting the length of the matching bridge, the matching of the antenna can be changed. In an alternative embodiment, a loading resistor is attached to the matching bridge in order to enhance the bandwidth of the antenna. The size of the antenna of the present invention can be reduced to 20-30 % of the conventional PIFA antenna (i.e., less than 1/10 of the wavelength of the operating frequency). As a result, the antenna can be used in a very compact chassis.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

-1-

5

## **MINIATURE PRINTED SPIRAL ANTENNA FOR MOBILE TERMINALS**

10

### **BACKGROUND**

The present invention relates generally to radio communication systems and, in particular, to a miniature printed spiral antenna which can be incorporated into a portable terminal.

15

The cellular telephone industry has made phenomenal strides in commercial operations in the United States as well as the rest of the world. Growth in major metropolitan areas has far exceeded expectations and is rapidly outstripping system capacity. If this trend continues, the effects of this industry's growth will soon reach even the smallest markets. Innovative solutions are required to meet these increasing capacity needs as well as maintain high quality service and avoid rising prices.

20

Throughout the world, one important step in the advancement of radio communication systems is the change from analog to digital transmission. Equally significant is the choice of an effective digital transmission scheme for implementing the next generation technology, e.g., time division multiple access (TDMA) or code division multiple access (CDMA). Furthermore, it is widely believed that the first generation of Personal Communication Networks (PCNs), employing low cost, pocket-sized, cordless telephones that can be carried comfortably and used to make or receive calls in the home, office, street, car, etc., will be provided by, for example, cellular carriers using the next generation digital cellular system infrastructure.

25

30

To provide an acceptable level of equipment compatibility, standards have been created in various regions of the world. For example, analog standards such as AMPS

-2-

(Advanced Mobile Phone System), NMT (Nordic Mobile Telephone) and ETACS and digital standards such as D-AMPS (e.g., as specified in EIA/TIA-IS-54-B and IS-136) and GSM (Global System for Mobile Communications adopted by ETSI) have been promulgated to standardize design criteria for radio communication systems. Once  
5 created, these standards tend to be reused in the same or similar form, to specify additional systems. For example, in addition to the original GSM system, there also exists the DCS1800 (specified by ETSI) and PCS1900 (specified by JTC in J-STD-007), both of which are based on GSM.

However, the most recent evolution in cellular communication services involves  
10 the adoption of additional frequency bands for use in handling mobile communications, e.g., for Personal Communication Services (PCS) services. Taking the U.S. as an example, the Cellular hyperband is assigned two frequency bands (commonly referred to as the A frequency band and the B frequency band) for carrying and controlling communications in the 800 MHz region. The PCS hyperband, on the other hand, is  
15 specified in the United States to include six different frequency bands (A, B, C, D, E and F) in the 1900 MHz region. Thus, eight frequency bands are now available in any given service area of the U.S. to facilitate communication services. Certain standards have been approved for the PCS hyperband (e.g., PCS1900 (J-STD-007)), while others have been approved for the Cellular hyperband (e.g., D-AMPS (IS-136)).

20 Each one of the frequency bands specified for the Cellular and PCS hyperbands is allocated a plurality of traffic channels and at least one access or control channel. The control channel is used to control or supervise the operation of mobile stations by means of information transmitted to and received from the mobile stations. Such information may include incoming call signals, outgoing call signals, page signals, page  
25 response signals, location registration signals, voice channel assignments, maintenance instructions, hand-off, and cell selection or reselection instructions as a mobile station travels out of the radio coverage of one cell and into the radio coverage of another cell.

-3-

The control and voice channels may operate using either analog modulation or digital modulation.

The signals transmitted by a base station in the downlink over the traffic and control channels are received by mobile or portable terminals, each of which have at least one antenna. Historically, portable terminals have employed a number of different types of antennas to receive and transmit signals over the air interface. For example, monopole antennas mounted perpendicularly to a conducting surface have been found to provide good radiation characteristics, desirable drive point impedances and relatively simple construction. Monopole antennas can be created in various physical forms. For example, rod or whip antennas have frequently been used in conjunction with portable terminals. For high frequency applications where an antenna's length is to be minimized, another choice is the helical antenna.

Presently, antennas for radio communication devices, such as mobile phones, are mounted directly on the phone chassis. However, as the size and weight of portable terminals continue to decrease, the above-described antennas become less advantageous due to their size. As a result, built-in antennas will be necessary for these future compact portable terminals which are capable of operating in a 300MHz to 3000MHz frequency range.

Conventional built-in antennas currently in use in mobile phones include microstrip patch antennas and planar inverted-F antennas. Microstrip antennas are small in size and light in weight. The planar inverted-F antenna (PIFA) has already been implemented in a mobile phone handset, as described by K. Qassim, "Inverted-F Antenna for Portable Handsets", IEE Colloquium on Microwave Filters and Antennas for Personal Communication Systems, pp.3/1-3/6, Feb.1994, London, UK. And, more recently, Lai et al. has published a meandering inverted-F antenna (WO 96/27219). This antenna has a size which is about 40% of that of the conventional PIFA antenna.

Figures 1A and 1B illustrate the conventional planar patch antenna compared to the meandering inverted-F antenna described in Lai et al. The conventional planar

-4-

patch antenna of Figure 1A has both a size and length equal to, for example, a quarter wavelength of the frequency to which the antenna is to be made resonant. The conventional planar patch antenna also has a width of W. The meandering inverted-F antenna, illustrated in Figure 1B, also has a length equal to a quarter wavelength of the resonant frequency and a width equal to W; however, the size of the meandering inverted-F antenna is reduced to about 40% of the size of the conventional planar patch antenna. This reduction in size is attributable to the antenna's meandering shape.

As mobile phones become smaller and smaller, both conventional microstrip patch and PIFA antennas are still too large to fit the future small phone chassis. This is particularly problematic when next generation phones need multiple antennas for cellular, wireless local area network, GPS and diversity.

## SUMMARY

The present invention seeks to overcome the above-identified deficiencies in the art by providing a built-in printed spiral antenna which is small enough to satisfy the needs of future compact mobile terminals. According to exemplary embodiments, a built-in antenna is provided which includes a printed spiral metal strip that is connected to the mobile terminal's printed circuit board via a substrate. Matching of the antenna is performed by a matching bridge which is positioned between a feeding pin and a grounded post. By adjusting the length of the matching bridge, the matching of the antenna can be changed. In an alternative embodiment, a loading resistor is attached to the matching bridge in order to enhance the bandwidth of the antenna. The size of the antenna of the present invention can be reduced to 20-30% of the conventional PIFA antenna (i.e., less than 1/10 of the wavelength of the operating frequency). As a result, the antenna can be used in a very compact chassis.

## BRIEF DESCRIPTION OF THE DRAWINGS

The above objects and features of the present invention will be more apparent from the following description of the preferred embodiments with reference to the accompanying drawings, wherein:

5            Figures 1A and 1B illustrate the conventional planar patch antenna compared to the conventional meandering inverted-F antenna;

            Figure 2 illustrates a radio communication device in which the antenna of the present invention may be implemented;

            Figure 3 illustrates the built-in antenna according to a first embodiment of the  
10            present invention;

            Figure 4 illustrates a top view of the built-in spiral antenna of the present invention;

            Figure 5 illustrates the built-in spiral antenna according to a second embodiment of the present invention;

15            Figure 6 illustrates the VSWR performance of a miniature printed spiral antenna of the present invention designed for a W-Lan application;

            Figure 7 illustrates the VSWR performance of a miniature printed spiral antenna of the present invention designed for operation in the GSM band; and

            Figure 8 illustrates the VSWR performance of the miniature printed spiral  
20            antenna of Figure 7 implementing the resistor enhancement technique of the present invention.

## DETAILED DESCRIPTION

            Figure 2 illustrates a radio communication device 200 in which the built-in  
25            antenna of the present invention may be implemented. Communication device 200 includes a chassis 210 having a microphone opening 220 and speaker opening 230 located approximately next to the position of the mouth and ear, respectively, of a user. A keypad 240 allows the user to interact with the communication device, e.g., by

-6-

inputting a telephone number to be dialed. The communication device 200 also includes a built-in antenna assembly 250, the details of which will be described below.

Figure 3 illustrates the built-in antenna assembly according to an exemplary embodiment of the present invention. The built-in antenna, according to the present invention, includes a printed metallic strip 315 which is configured in an inner spiral shape and is attached to the printed circuit board (PCB) 310 of the communication device via a dielectric substrate 320. The inner spiral shape allows for a reduction in size over the conventional planar patch and meandering inverted-F antennas. By forming the printed metallic strip in an inner spiral shape, the size of the antenna, according to the present invention, can be reduced to about 20% of the conventional planar patch antenna while still maintaining a length of  $1/4$  wavelength. One skilled in the art will appreciate that the length of the printed metallic strip of the present invention is not limited to  $1/4$  wavelength, but other lengths may be chosen, such as  $1/2$  wavelength.

The printed spiral metallic strip 315 is fed by an antenna feed pin 325 at the end of the outer turn of the spiral. One skilled in the art will appreciate that the current on the spiral metallic strip 315 decays from the feeding point 325 to the other end of the metallic strip. As a result, the antenna has higher radiation efficiency when the current is distributed mostly in the outer edge of the antenna.

As illustrated in Figure 3 and in the top view of the antenna set forth in Figure 4, the built-in antenna also includes a matching bridge 330 positioned between the feeding pin 325 and the grounded post 335. The matching bridge 330 acts to tune the antenna and forms a small loop antenna between the feeding pin 325 and grounded post 335. Tuning of an antenna refers to matching the impedance seen by an antenna at its input terminals such that the input impedance is seen to be purely resistive, i.e., it will have no appreciable reactive component. The tuning of the antenna system of the present invention is performed by measuring or estimating the input impedance associated with the antenna and providing an appropriate impedance matching circuit



-7-

(i.e., the matching bridge). The matching of the antenna, according to the present invention, can be adjusted by changing the length of the matching bridge 330. This is accomplished by simply changing the location of the grounded post 335. The length of the matching bridge is generally in the order of  $0.01\lambda$  to  $0.1\lambda$ .

5           As is evident from Figure 3, the printed spiral antenna is positioned over the PCB and forms a spiral slot between the spiral metallic strip 315 and the PCB 310. One skilled in the art will appreciate that it is the spiral slot that forms the main radiator (or sensor) of the present antenna system.

10           The resonant frequency and bandwidth of the built-in antenna of the present invention are dependent upon the area and thickness of the dielectric substrate, the type of dielectric material selected (i.e., the dielectric constant), the spiral length of the metallic strip and the rate of expansion of the spiral. Generally, the length of the printed spiral metallic strip is selected to be approximately  $1/4$  wavelength of the frequency band to which the antenna is to be tuned. One skilled in the art will  
15           appreciate, however, that other lengths may be chosen, such as  $1/2$  wavelength. One skilled in the art will also appreciate that an increase in the area or thickness of the dielectric substrate or the tightness of the spiral (i.e., the rate of the expansion of the spiral) or a decrease in the value of the dielectric constant results in an increase in the bandwidth which can be achieved.

20           As is evident from Figure 3, the spiral antenna of the present invention can be mounted at the edge of the PCB which provides for better radiation efficiency and bandwidth. In addition, the PCB space requirement for the spiral antenna is minimized due to its small size.

25           The antenna assembly of the present invention works as a magnetic antenna. As a result, the spiral metal strip creates nearly circular polarized waves (as opposed to linear polarized waves achieved by the conventional antennas described above with respect to Figures 1A and 1B) when the rate of expansion of the spiral (i.e., the tightness of the spiral) is chosen properly. This would be advantageous in a multipath

environment, such as mobile radio communications, and in satellite (e.g., GPS) communications where circular polarized signals are generally used. Moreover, as a magnetic antenna, there is less interference from the human body.

Figure 5 illustrates the built-in spiral antenna according to a second embodiment of the present invention. One skilled in the art will appreciate that a printed antenna on a ground plane has a narrower bandwidth than the bandwidth of the earlier-described conventional monopole or dipole antenna. The bandwidth of such a printed antenna can be enhanced by introducing some loss into the system. This is evident from the fact that loss always indicates a lower Q-factor and thus a higher bandwidth. The following equation illustrates the relationship between the Q-factor and the achievable bandwidth:

$$Q = f_0 / BW$$

where  $f_0$  is the center frequency and BW is the bandwidth.

According to an exemplary embodiment of the present invention, a loading resistor 560 is connected in series to the matching bridge 330 in order to introduce loss into the system. In the alternative, the same result can be achieved by connecting the resistor 560 in parallel to the grounded post 335. The resistor of the present invention can be either a chip resistor or a resistor film. The resistor introduces loss in the antenna's radiated power which results in broader bandwidth.

The resistor value can be selected in order to satisfy particular design requirements. In a situation where high efficiency is needed (i.e., loss is to be kept small), a small resistor value should be used. However, in a situation where a wide bandwidth is critical, a larger resistor value should be used.

In order to illustrate the effectiveness of the present invention, Figures 6-8 set forth results of simulations for exemplary built-in spiral antennas. The antennas in the simulations were mounted on a printed circuit board via a dielectric substrate. In the first simulation, the results of which are illustrated in Figure 6, a design for a W-LAN application was considered. The printed spiral antenna had a length of 0.082

wavelength, a width of 0.08 wavelength and a height of 0.04 wavelength. The bandwidth of the antenna was 5.3% for a VSWR less than 2.5:1. Figure 6 illustrates the VSWR performance of the antenna of the present invention for the first simulation. It is evident from Figure 6 that the antenna achieves approximately 130MHz for a  
5 2.45GHz band, which would satisfy the requirements for a W-LAN application.

In the second simulation, the antenna was designed for operation in the GSM band. The length of the printed spiral antenna was 0.073 wavelength (22mm), the width was 0.067 wavelength (20mm) and the height was 0.04 wavelength (12mm). The bandwidth of the antenna was 4.2% for a VSWR less than 2.5:1. In this  
10 simulation, the antenna achieved approximately 40MHz for the GSM band which would not satisfy the requirements for a GSM application. Figure 7 shows the VSWR performance for this design.

In the third simulation, bandwidth enhancement was introduced to the GSM band antenna set forth above by attaching a 1 ohm chip resistor to the matching bridge  
15 of the antenna. As a result, the bandwidth of the antenna is increased to 9.3% (about 88MHz). The VSWR performance for this simulation is illustrated in Figure 8. The performance of this bandwidth enhanced antenna would satisfy the requirements for a GSM application; however, the antenna's gain is reduced approximately 3dB.

The foregoing has described the principles, preferred embodiments and modes  
20 of operation of the present invention. However, the invention should not be construed as being limited to the particular embodiments discussed above. For example, while the antenna of the present invention has been discussed primarily as being a radiator, one skilled in the art will appreciate that the printed miniature spiral antenna would also be used as a sensor for receiving information at specific frequencies. Thus, the above-  
25 described embodiments should be regarded as illustrative rather than restrictive, and it should be appreciated that variations may be made in those embodiments by workers skilled in the art without departing from the scope of the present invention as defined by the following claims.

-10-

**WHAT IS CLAIMED IS:**

1. A communication device for use in a radio communication system, said device comprising:
  - 5 a microphone opening for allowing the communication device to receive auditory information from a user;
  - a speaker opening for allowing the communication device to transmit auditory information to said user;
  - a keypad; and
  - 10 an antenna comprising a printed spiral metallic strip;
  - wherein said antenna is a built-in antenna.
2. The communication device of claim 1 further comprising a matching bridge for matching an input impedance of said antenna.
- 15 3. The communication device of claim 2 wherein the matching of said antenna is adjusted by changing a length of the matching bridge.
4. The communication device of claim 1 wherein said printed spiral  
20 metallic strip is fed with a current at an end of an outer turn of said spirals.
5. The communication device of claim 1 further comprising a printed circuit board onto which said built-in antenna is mounted.
- 25 6. The communication device of claim 1 wherein a length of said printed metallic strip is selected to be approximately  $1/4$  wavelength of the frequency band to which the antenna is to be tuned.

-11-

7. The communication device of claim 2 further comprising a loading resistor attached to said matching bridge for enhancing a bandwidth of said antenna.

8. A communication device for use in a radio communication system, said  
5 device comprising:

a printed circuit board mounted on a chassis of said communication device;

a substrate attached to said printed circuit board and having a predetermined thickness; and

10 an antenna mounted on said substrate and comprising a printed spiral metallic strip;

wherein said antenna is a built-in antenna.

9. The communication device of claim 8 further comprising a matching  
15 bridge for matching an input impedance of said antenna and located between a feeding point and a grounded post.

10. The communication device of claim 9 wherein the matching of said antenna is adjusted by changing a length of the matching bridge.

20

11. The communication device of claim 8 wherein a length of said printed spiral metallic strip is selected to be approximately  $1/4$  wavelength of the frequency band to which the antenna is to be tuned.

25 12. The communication device of claim 9 further comprising a loading resistor attached to said matching bridge for enhancing a bandwidth of said antenna.

-12-

13. The communication device of claim 8 wherein a bandwidth of said antenna depends on a size of said printed spiral metallic strip and the thickness and dielectric constant of said substrate.

5 14. The communication device of claim 9 wherein said matching bridge forms a loop antenna between said feeding point and said grounded post.

15 15. An antenna for a radio communication device, said antenna comprising:  
a printed spiral metallic strip;  
a matching bridge for matching an input impedance of said antenna; and  
a loading resistor attached to said matching bridge;  
wherein said antenna is a built-in antenna.

16 16. The antenna of claim 15 wherein a bandwidth of said antenna depends on a value of said loading resistor.

17. The antenna of claim 15 wherein the matching of said antenna is adjusted by changing a length of the matching bridge.

20 18. The antenna of claim 15 wherein said printed spiral metallic strip is connected to a printed circuit board of said radio communication device via a substrate.

19. The antenna of claim 15 wherein a current in said printed spiral metallic strip is fed at an end of an outer turn of said spiral.

25

20. The antenna of claim 15 wherein a length of said printed spiral metallic strip is selected as approximately  $1/4$  wavelength of the frequency band to which the antenna is to be tuned.

1/7

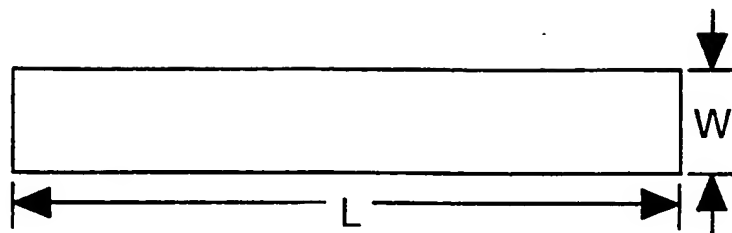


FIG. 1A

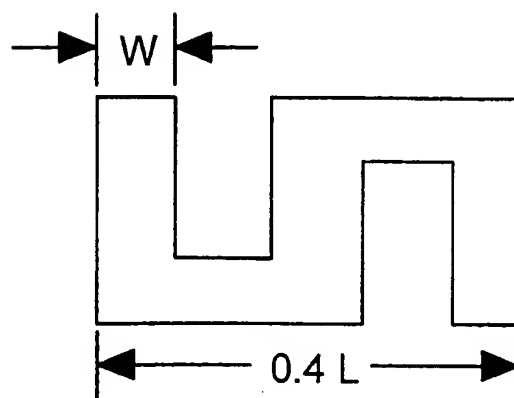


FIG. 1B

2/7


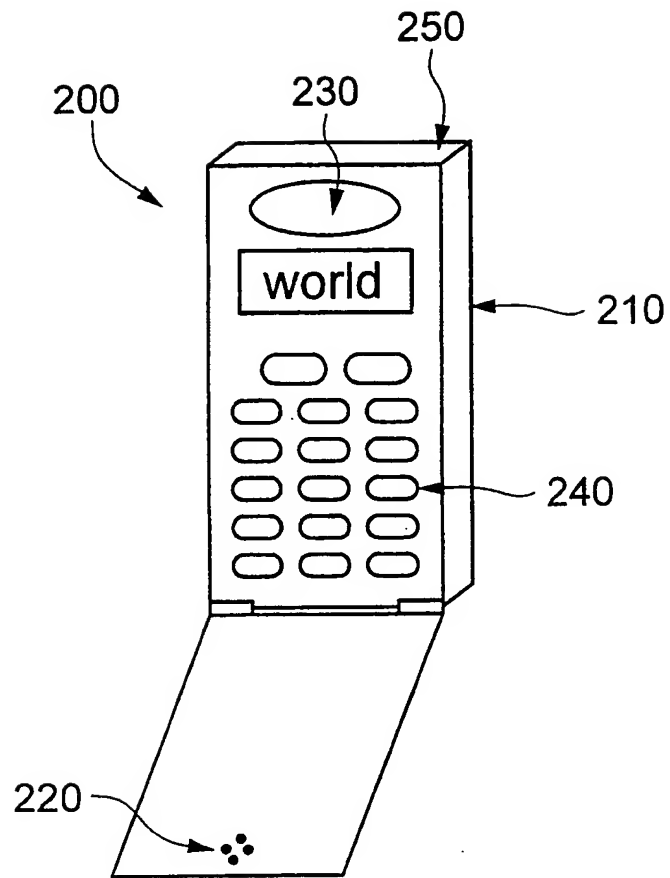


FIG. 2

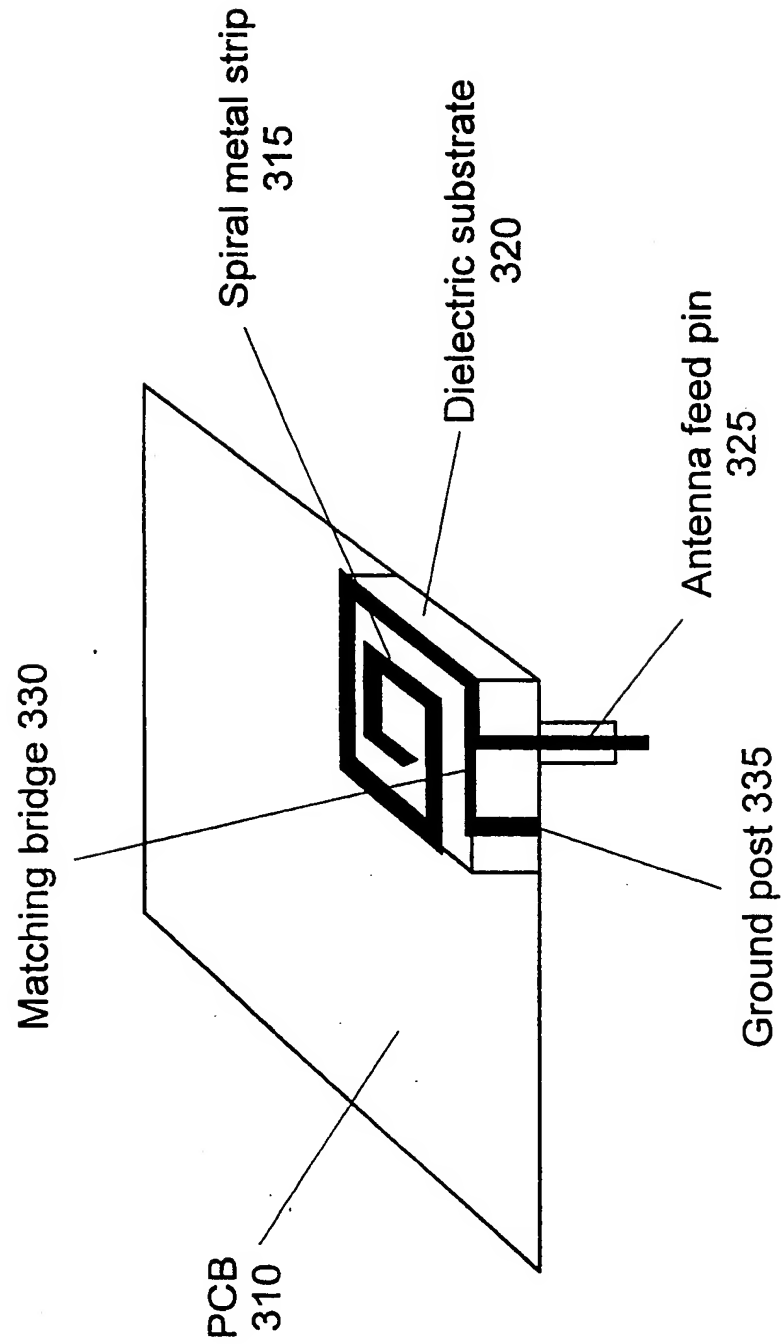

3/7

FIG. 3



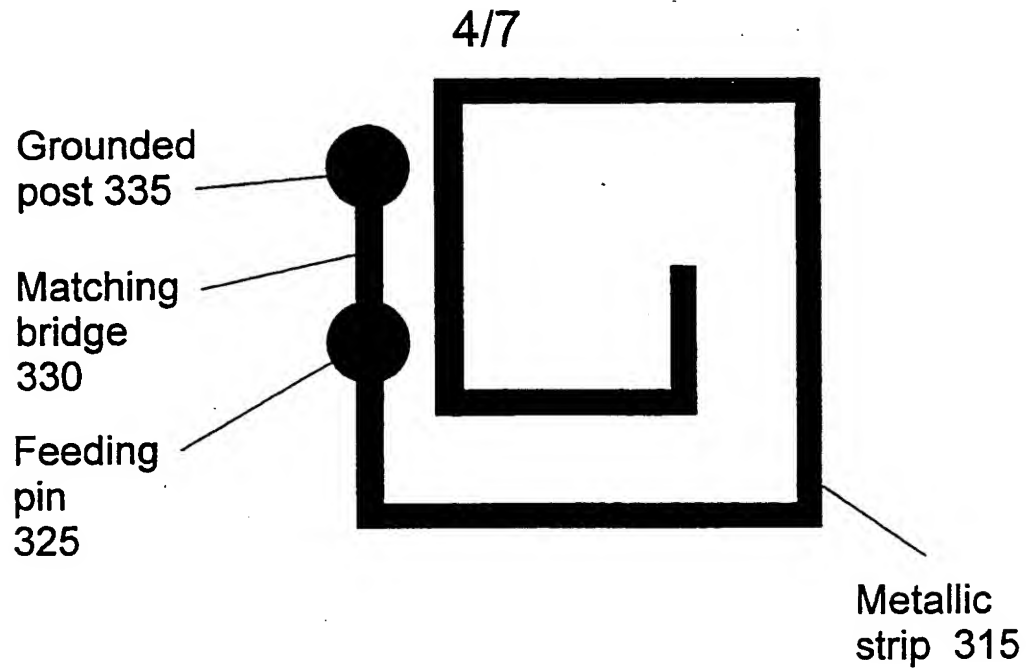


FIG. 4

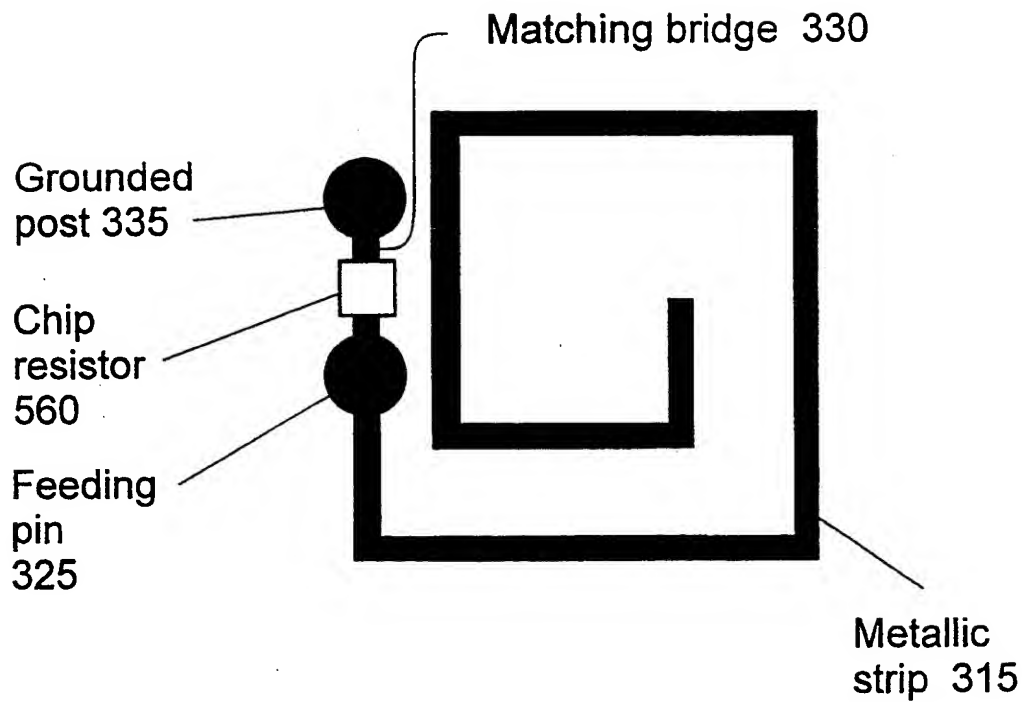


FIG. 5

5/7

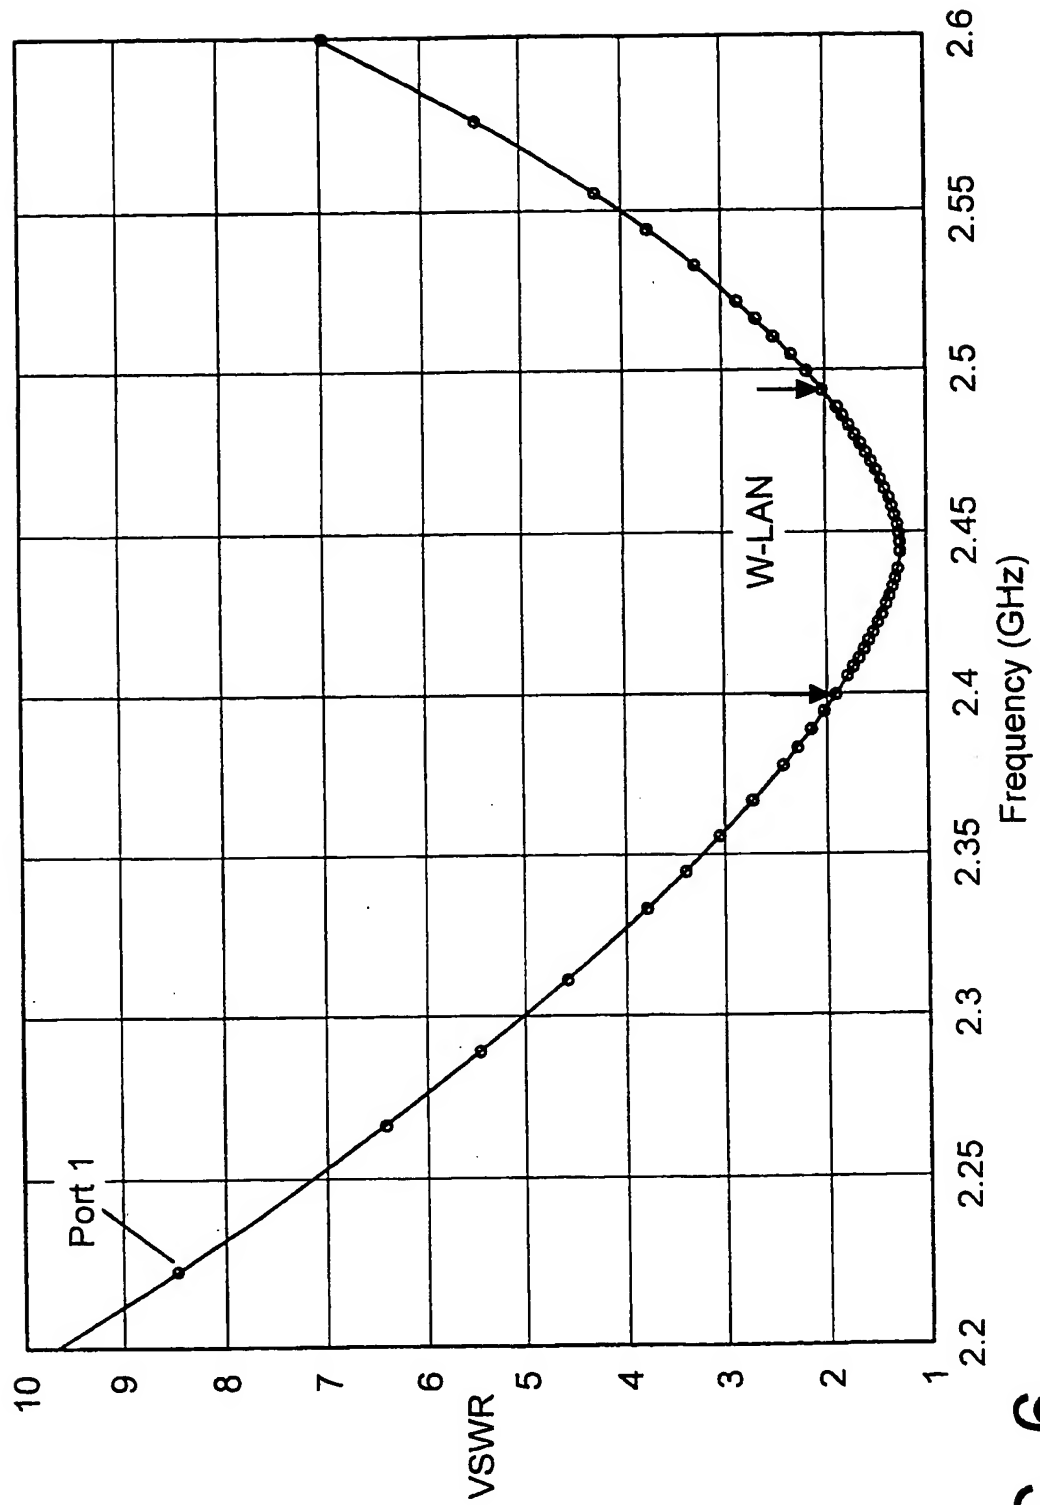


FIG. 6

6/7

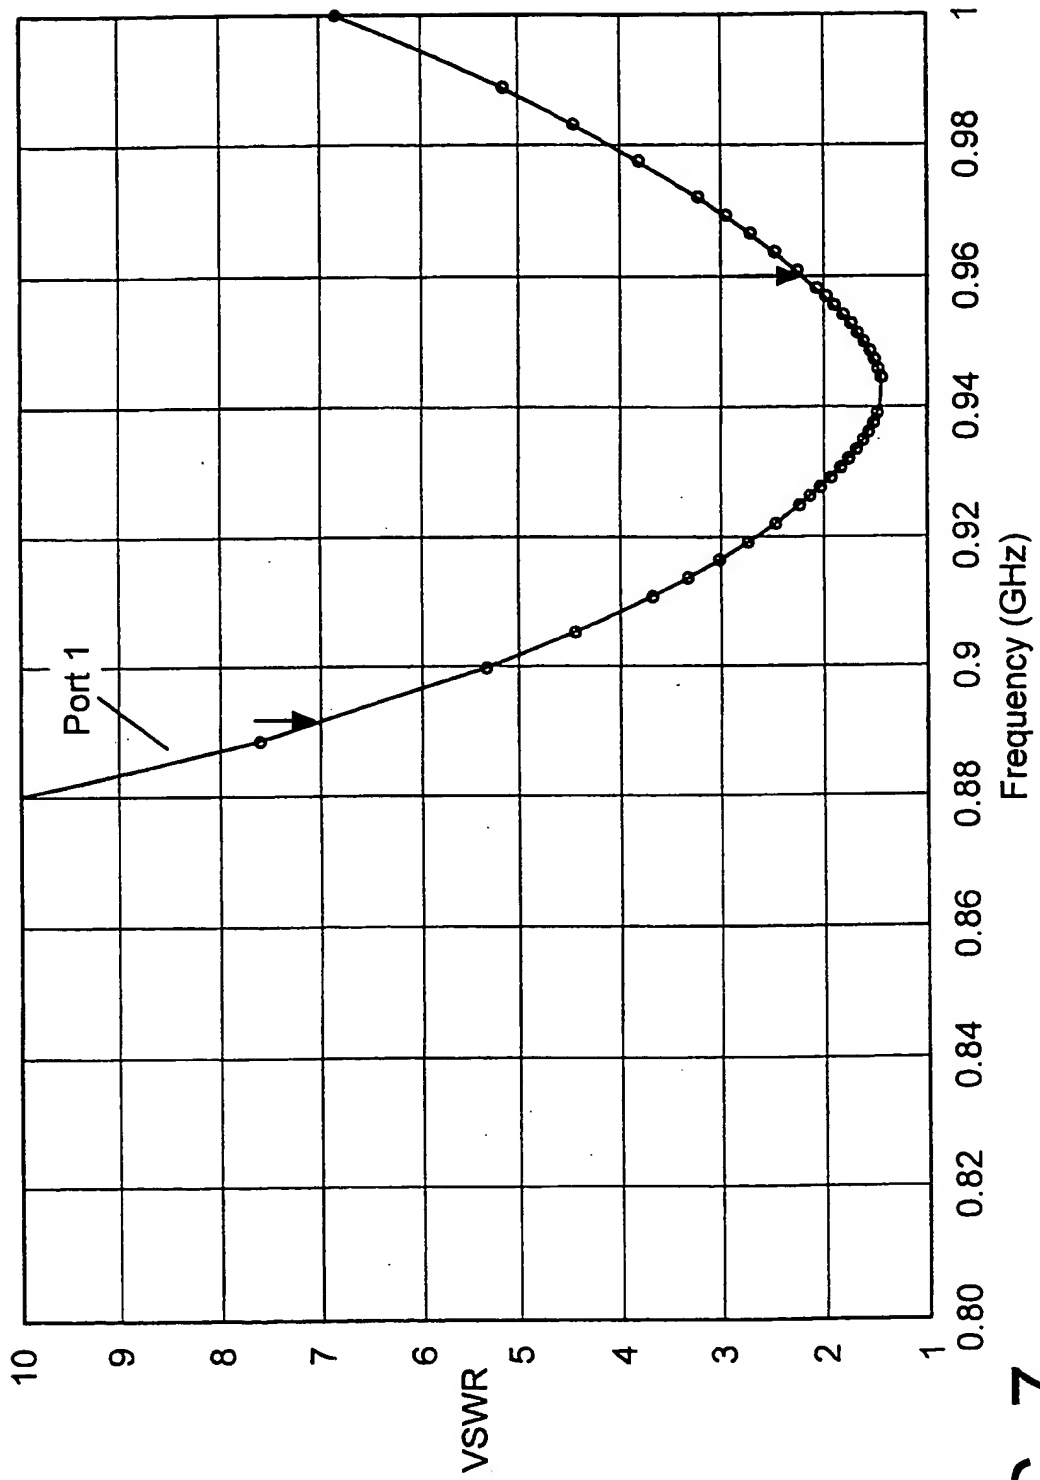


FIG. 7

7/7

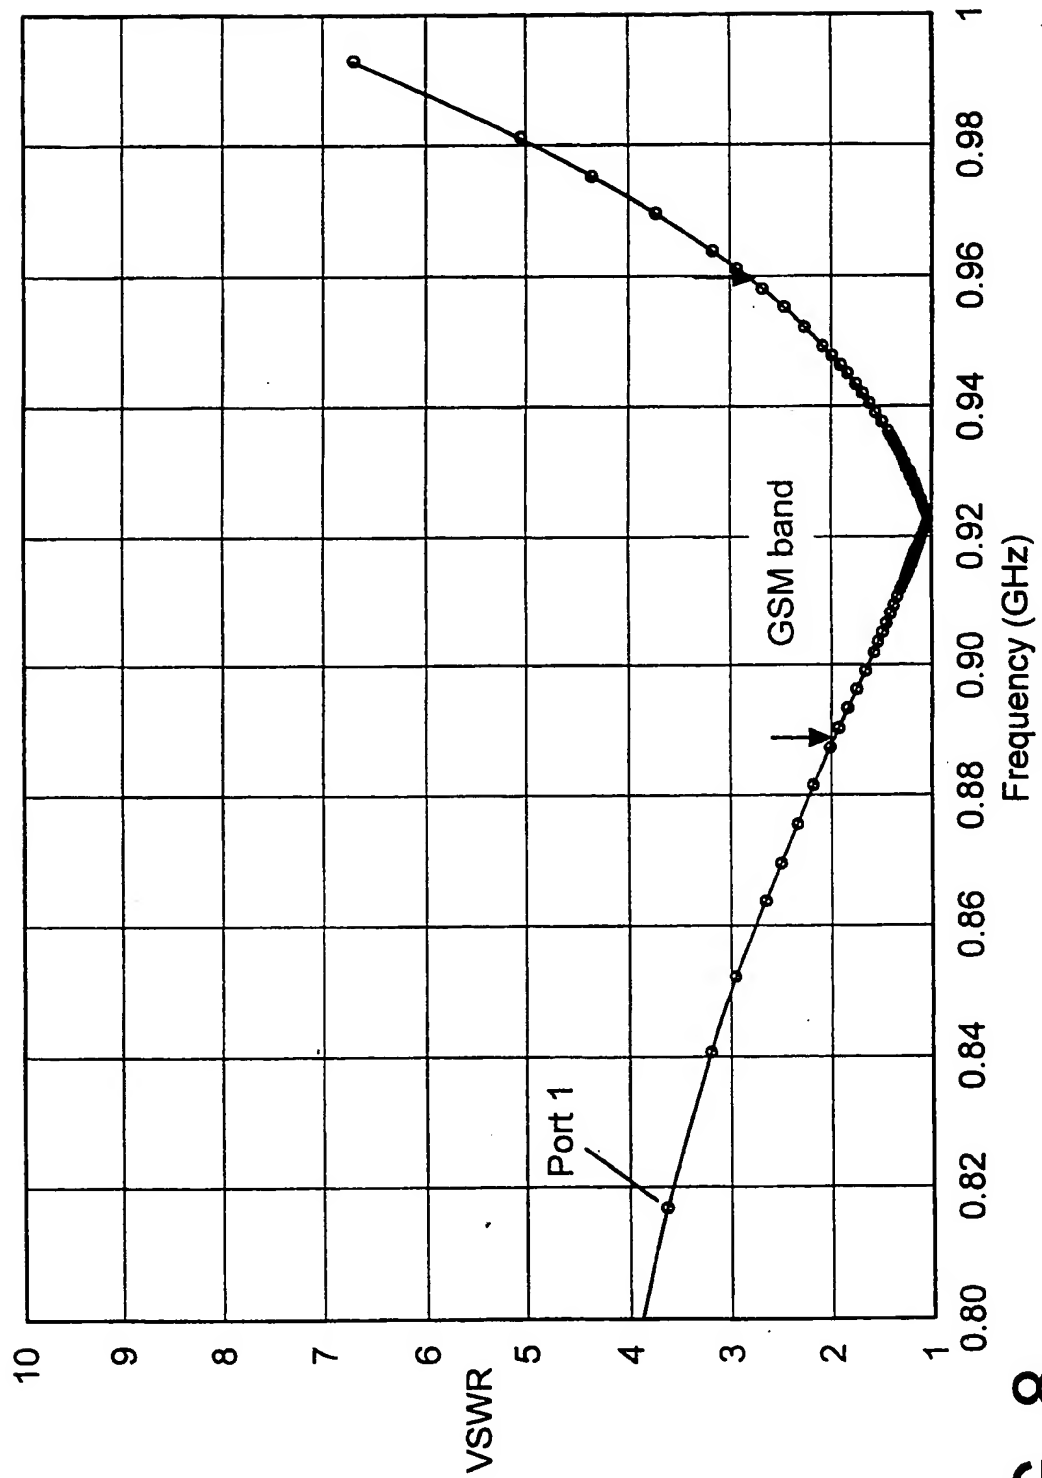


FIG. 8

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 99/01251

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H01Q1/24 H01Q9/27 H01Q1/38

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H01Q H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 47054 A (INTERCELL WIRELESS CORP ; EL SHARAWY EL BADAWY AMIEN (US)) 11 December 1997 (1997-12-11) page 4, line 1 -page 9, line 33; figures 1-4	1-6, 8-11, 13, 14
Y	---	7, 12, 15-20
X	EP 0 590 671 A (TOKYO SHIBAURA ELECTRIC CO) 6 April 1994 (1994-04-06) figures 1, 14, 24, 28	1, 5, 6, 8, 11, 13
X	PATENT ABSTRACTS OF JAPAN vol. 017, no. 264 (E-1370), 24 May 1993 (1993-05-24) -& JP 05 007109 A (MITSUBISHI ELECTRIC CORP), 14 January 1993 (1993-01-14) abstract; figure 2	1, 8
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

15 November 1999

Date of mailing of the international search report

22/11/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Van Dooren, G

## INTERNATIONAL SEARCH REPORT

Inte n al Application No

PCT/SE 99/01251

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 600 335 A (ABRAMO ROBERT S) 4 February 1997 (1997-02-04) column 1, line 16-39 ---	7,12, 15-20
P,X	EP 0 884 796 A (MATSUSHITA ELECTRIC IND CO LTD) 16 December 1998 (1998-12-16) * embodiment 2,5,27 * figures 3,4,13,53 ---	1-4,6, 8-11,13
A	CHEN J ET AL: "FDTD ANALYSIS OF PRINTED SQUARE SPIRAL ANTENNAS FOR WIRELESS COMMUNICATIONS" IEEE ANTENNAS AND PROPAGATION SOCIETY INTERNATIONAL SYMPOSIUM 1997 DIGEST, MONTREAL, QUEBEC, JULY 14 - 18, 1997, vol. 3, 14 July 1997 (1997-07-14), pages 1550-1553, XP000790509 INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS the whole document ---	1,8
A	SHIH-CHANG WU ET AL: "SPECTRAL DOMAIN ANALYSIS OF A SQUARE MICROSTRIP SPIRAL ANTENNA" PROCEEDINGS OF THE ANTENNAS AND PROPAGATION SOCIETY ANNUAL MEETING, 1991. VENUE AND EXACT DATE NOT SHOWN, vol. 2, 1 January 1991 (1991-01-01), pages 970-973, XP000239785 INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS ---	
A	AU 55898 73 A (ANTENNA ENG AUSTRALIA) 21 November 1974 (1974-11-21) -----	

# INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/SE 99/01251

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9747054 A	11-12-1997	AU 2748797 A	05-01-1998
EP 0590671 A	06-04-1994	JP 6169217 A	14-06-1994
		DE 69315939 D	05-02-1998
		DE 69315939 T	20-05-1998
		US 5936583 A	10-08-1994
JP 05007109 A	14-01-1993	JP 2653277 B	17-09-1997
US 5600335 A	04-02-1997	NONE	
EP 0884796 A	16-12-1998	CN 1211833 A	24-03-1999
AU 5589873 A	21-11-1974	NONE	



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**